
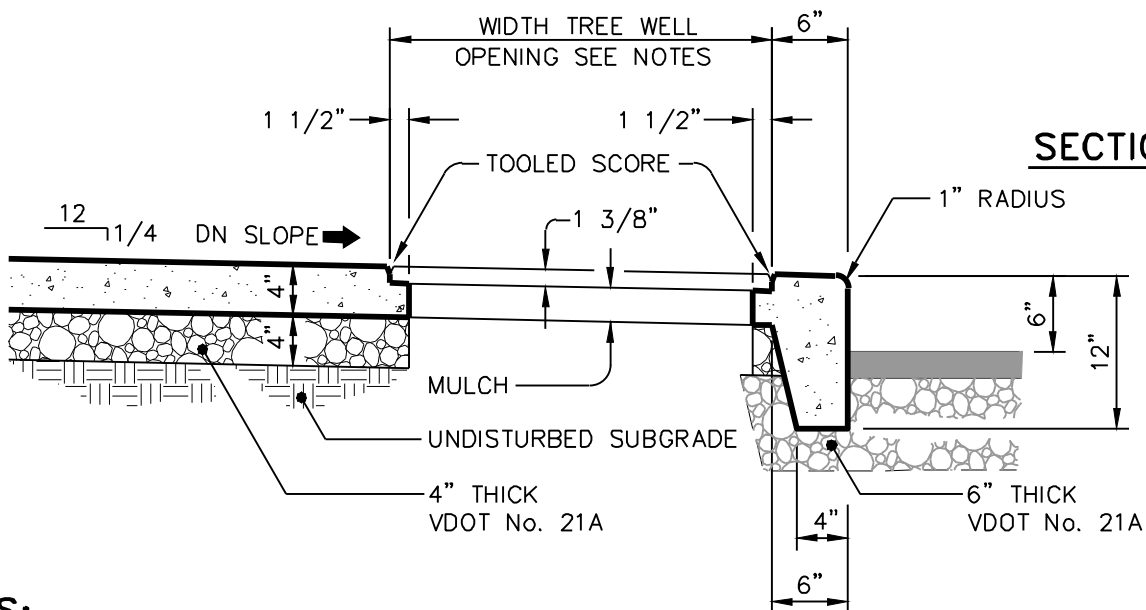


SEE NOTES  
BELOW FOR  
PART #'s

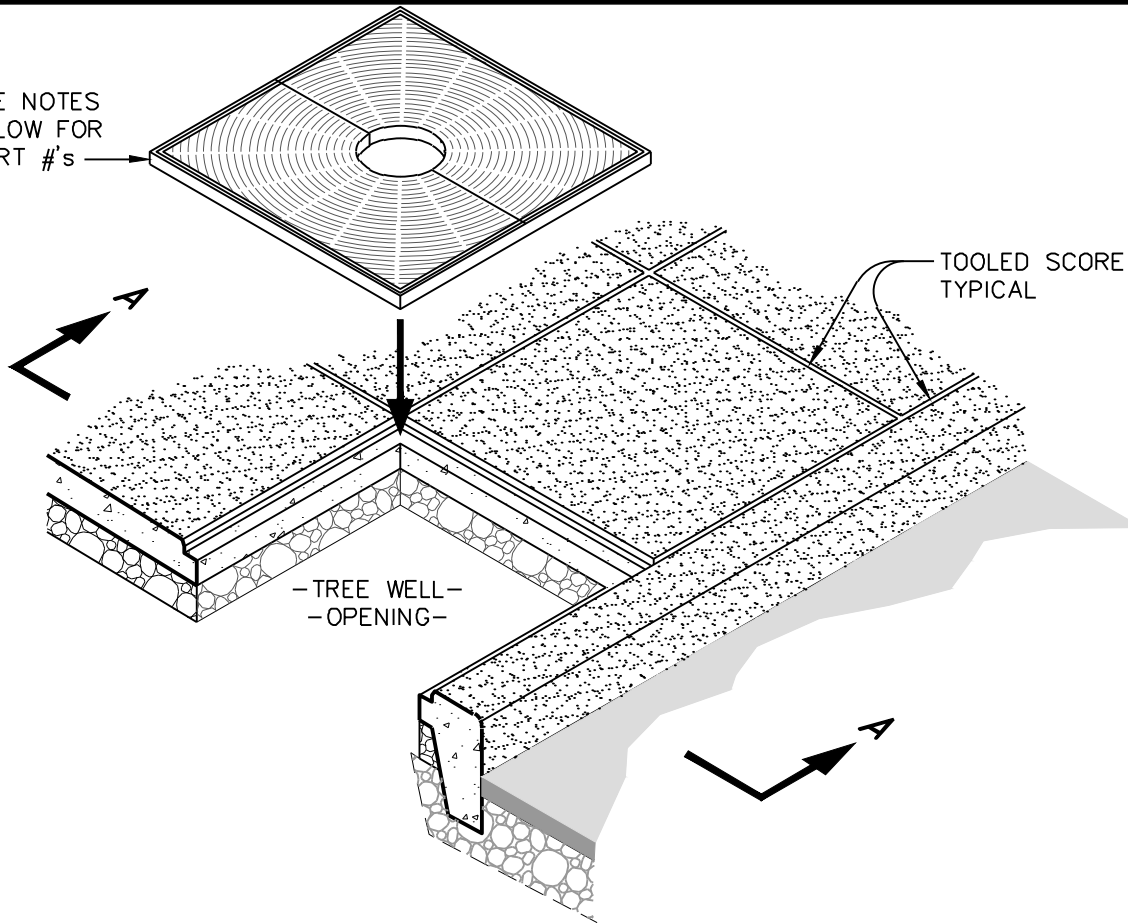

## SECTION A-A

### NOTES:

1. FOR 4' SIDEWALKS USE NEENAH R-8710 180° SQUARE WITH 3/8" SLOT OPENINGS.  
FOR 5' SIDEWALKS USE NEENAH R-8712 180° SQUARE WITH 3/8" SLOT OPENINGS.
2. FOR NEW CONSTRUCTION: SIDEWALK AND CURB TO BE POURED MONOLITHICALLY.  
FOR EXISTING SIDEWALK: SAW CUT SIDEWALK FOR TREE WELL OPENING.
3. CONCRETE TO BE CLASS 3,000 P.S.I.



## THE CITY OF LYNCHBURG

### TREE WELL OPENING IN SIDEWALK

USE WITH THE CITY OF LYNCHBURG STANDARD SPECIFICATIONS ONLY

SCALE:  
NOT TO SCALE

REVISION DATE:  
12-12-2014

DETAIL #  
**25.07**

SHEET #:  
1 OF 1